




# SELF-PROPELLED SCISSOR LIFTS

## GS™-2032



## Specifications

MODELS		GS™-2032	
MEASUREMENTS	Metric	US	
Working height maximum*	8.10 m	26 ft	
<b>A</b> Platform height maximum	6.10 m	20 ft	
<b>B</b> Platform height stowed	1.03 m	3 ft 4.5 in	
<b>C</b> Platform length - outside		7 ft 5 in	
	extended	10 ft 5 in	
Slide-out platform extension deck	91 cm	3 ft	
<b>D</b> Platform width - outside	81 cm	2 ft 8 in	
Guardrail height: Rigid Rail		3 ft 3 in	
	Fold Down Rail	3 ft 7 in	
Toeboard height	15 cm	6 in	
<b>E</b> Height - stowed	fixed rails	2.13 m 7 ft	
	folding guardrails	2.13 m 7 ft	
	rails folded	1.75 m 5 ft 9 in	
<b>F</b> Length - stowed		2.44 m 8 ft	
	Length - extended	3.33 m 10 ft 11 in	
<b>G</b> Width	81 cm	2 ft 8 in	
<b>H</b> Wheelbase	1.85 m	6 ft 1 in	
<b>I</b> Ground clearance - centre	9 cm	3.5 in	
<b>J</b> - with pothole guards deployed	2 cm	.75 in	

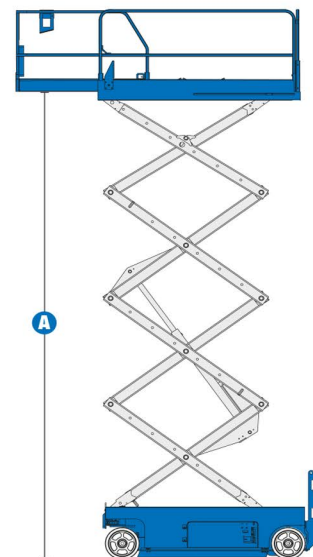

PRODUCTIVITY		
Max platform occupancy (indoor/outdoor)	2/1	2/1
Lift capacity	363 kg	800 lbs
Drive height	full height	
Drive speed - stowed	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed**	30%	
Max outrigger levelling: front to back	-	-
	side to side	-
Turning radius - inside	zero	zero
Turning radius - outside	2.13 m	7 ft
Raise / lower speed	30 / 34 sec	30 / 34 sec
Controls	proportional	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in

POWER		
Power source	24 V DC (four 6V 225 Ah batteries)	
Hydraulic system capacity	14.2 L	3.75 gal

WEIGHT***		
	1,825 kg	4,024 lbs

STANDARDS COMPLIANCE	CE EN280
----------------------	----------

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\* Weight will vary depending on options and/or country standards.