




SELF-PROPELLED SCISSOR LIFTS

GS™-3390 RT



Specifications

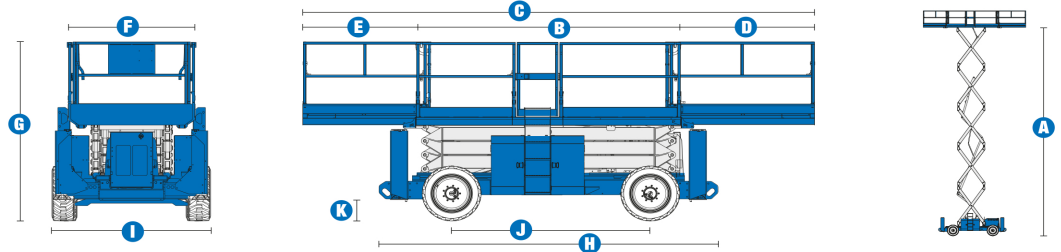

MODELS		GS™-3390 RT
MEASUREMENTS		Metric
Working height maximum*		12.10 m
A	Platform height maximum	10.10 m
B	Platform length:	3.89 m
	outside, extended single deck	5.34 m
C	outside, extended dual deck	6.57 m
D	Slide-out platform extension deck - front	1.52 m
E	Slide-out platform extension deck - rear	1.22 m
F	Platform width - outside	1.83 m
Platform height - stowed**		1.55 m
G	Height - stowed	2.71 m
	rails lowered	2.03 m
H	Length - stowed: single deck	3.94 m
	dual deck	3.98 m
	with outriggers	4.88 m
Length - extended:	single deck	5.40 m
	dual deck	6.57 m
	super deck	7.38 m
I	Width - standard tyres	2.29 m
	high flotation tyres	2.57 m
J	Wheelbase	2.84 m
K	Ground clearance - centre	36 cm

PRODUCTIVITY	
Max platform occupancy	7
Lift capacity	1,134 kg
Drive speed - stowed	6.4 km/h
Drive speed - raised	1.1 km/h
Gradeability***	50%
Turning radius - inside	2.16 m
Turning radius - outside	5.33 m
Controls	proportional
Raise / lower speed	45 / 29 sec
Tyres - foam-filled rough terrain	30 x 84 cm

POWER	
Power source	Deutz diesel D2011L03i 49 hp (36 kW), air cooled/ Ford DSG-423 4 cylinder petrol/LPG 75 hp (56 kW)
Fuel tank capacity	113.6 L
Hydraulic system capacity	113.6 L

WEIGHT****	
	5,533 kg
Unit weight modifiers for options	
Outriggers*****	add 760 kg
Dual Extension decks	add 165 kg
Super deck	add 220 kg
Non marking tyres RT	add 466 kg

STANDARDS COMPLIANCE	CE EN280, PB-10-611-03
-----------------------------	------------------------

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 5.8 cm (2 in) non-marking tyres.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards
 ***** Standard on GS-5390RT and with super deck.