
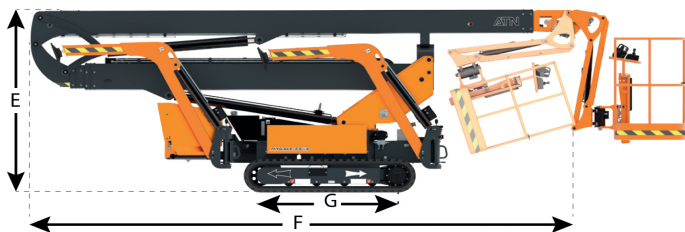


## MYGALE 23 V2

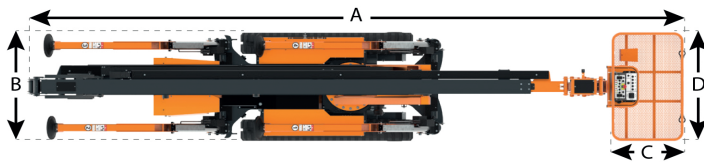

Working height	22,85 m
Floor height	20,85 m
Horizontal outreach	11 m
Knuckle height	11,25 m
Load capacity	230 kg

<b>A</b> Length	6,68 m
<b>B</b> Width	1,19 m
<b>C</b> Platform length	0,73 m
<b>D</b> Platform width	1,19 m
<b>E</b> Height	1,99 m
<b>F</b> Length (transport position)	5,55m
<b>G</b> Wheelbase	1,42 m

Turret rotation	351° NC
Platform rotation	180°
jib tilt angle	133°
Admissible wind speed	<45 km/h
Drive speed	1,5 km/h
Gradeability	32%
maximum slope possible on stabilisers	13,3° // 14,7°
Wide stabilisation footprint (H1xH2)	3,92x3,97 m
Stabilisation footprint wide and narrow (L1xL)	5,36x3,18 m
Narrow stabilisation footprint (L1xL2)	5,36x2,40 m

Total weight	3450 kg
Ground pressure on tracks	65 kN/m <sup>2</sup>
Ground pressure on stabilisers	154 kN/m <sup>2</sup>

Track width	0,23 m
Diesel engine	KUBOTA
Fuel tank capacity	25 L

**CE**

This product complies with European regulations in force (EN 280).  
Due to our constant improvement policy, ATN reserves the right to many any modifications without any prior notice.

Ri : Inside turning radius  
Re : Outside turning radius

